


338 Federal

Case: Federal	Primer: Federal GM210M
Case Trim: 2.005"	Barrel Length: 24"
Twist Rate: 1:10"	Barrel: Wiseman

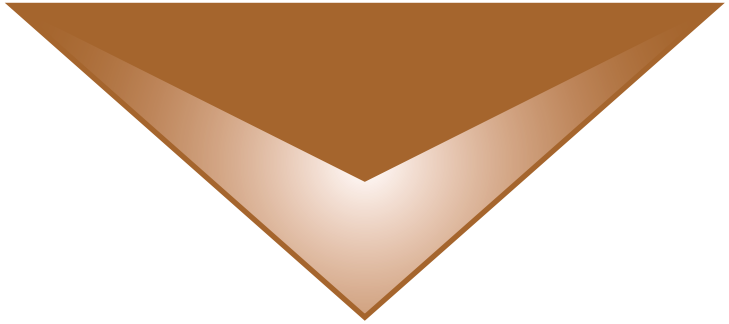

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Most Accurate Load*

[°] Compressed Load

338 Federal



160-grain TTSX FB
Sectional Density .200
Ballistic Coefficient .342
C.O.A.L 2.820"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4198	37.5	2641	41.5 ^c	2867
*RL 7	40.0	2695	44.0	2923
Benchmark	45.5	2793	49.5 ^c	2962
H4198	38.5	2655	42.5	2888
X-Terminator	46.0	2780	51.0 ^c	3003
A-2230	48.0	2861	53.0 ^c	3089



185-grain TSX BT
Sectional Density .231
Ballistic Coefficient .352
C.O.A.L 2.820"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*IMR 4198	36.0	2431	38.0	2572
RL 7	36.5	2445	39.0	2579
Benchmark	42.5	2540	45.5	2709
H322	41.0	2498	44.0	2658
X-Terminator	43.0	2536	46.5	2695
A-2230	45.0	2613	49.0	2798

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load

338 Federal



210-grain TSX BT
 Sectional Density .263
 Ballistic Coefficient .404
 C.O.A.L 2.820"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4198	34.0	2221	37.0	2382
RL 7	33.0	2151	36.0	2329
Benchmark	40.0	2347	43.0	2491
H322	38.5	2293	42.0	2459
*X-Terminator	40.0	2313	43.5	2485
A-2230	42.0	2388	46.0	2570



225-grain TSX FB
 Sectional Density .281
 Ballistic Coefficient .386
 C.O.A.L 2.820"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4198	32.0	2062	35.0	2238
*RL 7	32.5	2049	35.5	2201
Benchmark	38.5	2212	41.5	2360
H322	36.5	2156	40.0	2310
X-Terminator	39.0	2194	42.5	2365
A-2230	41.0	2269	44.5	2457

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

° Compressed Load