

340 Weatherby Magnum

Case: Norma


Primer: Federal 215

Case Trim: 2.815"

Barrel Length: 24"

Twist Rate: 1:10"

Barrel: Wiseman

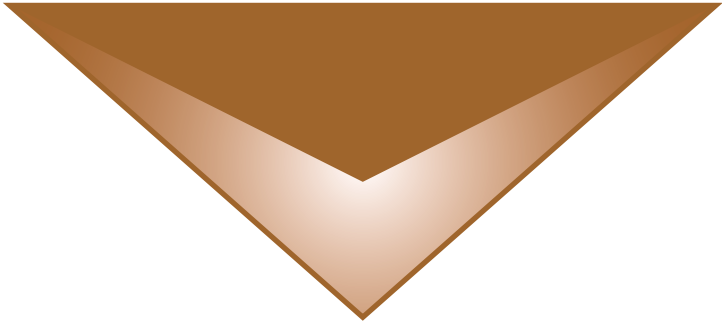

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Most Accurate Load*

[°] Compressed Load

340 Weatherby Magnum



160-grain TTSX FB
Sectional Density .200
Ballistic Coefficient .342
C.O.A.L 3.650"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|--------------|-----------------|----------------|-----------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| H380 | 81.0 | 3247 | 86.0 | 3430 |
| IMR 4007 SSC | 85.0 | 3331 | 90.0 | 3489 |
| *Win 760 | 87.5 | 3294 | 92.5 | 3483 |
| Viht N550 | 85.0 | 3324 | 90.0 | 3510 |
| H4350 | 88.0 | 3334 | 93.0 | 3478 |
| Hunter | 90.0 | 3317 | 95.0 | 3509 |



185-grain TSX BT
Sectional Density .231
Ballistic Coefficient .352
C.O.A.L 3.610"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|-----------|-----------------|----------------|-------------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| Win 760 | 81.0 | 3099 | 86.0 | 3247 |
| Viht N550 | 79.5 | 3103 | 84.5 | 3267 |
| *IMR 4350 | 85.0 | 3133 | 90.0 ^c | 3295 |
| H4350 | 83.0 | 3088 | 88.0 | 3253 |
| Hunter | 84.5 | 3115 | 89.5 | 3260 |
| RL 19 | 88.5 | 3109 | 93.5 ^c | 3257 |



185-grain TTSX BT
Sectional Density .231
Ballistic Coefficient .432
C.O.A.L 3.660"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load

340 Weatherby Magnum



210-grain TSX BT
Sectional Density .263
Ballistic Coefficient .404
C.O.A.L 3.620"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|--------------|-----------------|----------------|-------------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| *Viht N550 | 75.0 | 2819 | 80.0 | 3035 |
| IMR 4350 | 80.0 | 2886 | 85.0 ^c | 3062 |
| H4350 | 79.0 | 2863 | 84.0 | 3041 |
| RL 19 | 85.5 | 2965 | 90.5 ^c | 3112 |
| IMR 4831 | 82.5 | 2906 | 87.5 ^c | 3071 |
| IMR 7828 SSC | 87.0 | 2893 | 92.0 ^c | 3066 |



210-grain TTSX BT
Sectional Density .263
Ballistic Coefficient .482
C.O.A.L 3.660"

Suggested Bullet Use



225-grain TSX FB
Sectional Density .281
Ballistic Coefficient .386
C.O.A.L 3.620"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|---------------|-----------------|----------------|-------------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| H4350 | 77.0 | 2765 | 82.0 | 2921 |
| Hunter | 80.0 | 2777 | 85.0 | 2918 |
| RL 19 | 82.5 | 2812 | 87.5 ^c | 2981 |
| IMR 4831 | 81.0 | 2782 | 86.0 ^c | 2944 |
| MagPro | 92.0 | 2899 | 98.0 ^c | 3009 |
| *IMR 7828 SSC | 86.0 | 2789 | 91.0 ^c | 2970 |



225-grain TTSX BT
Sectional Density .281
Ballistic Coefficient .514
C.O.A.L 3.660"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load

340 Weatherby Magnum



250-grain TSX FB
Sectional Density .313
Ballistic Coefficient .425
C.O.A.L 3.620"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|--------------|-----------------|----------------|-------------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| IMR 4350 | 75.5 | 2601 | 80.5 ^c | 2774 |
| H4350 | 73.0 | 2592 | 78.0 | 2739 |
| RL 19 | 80.0 | 2641 | 85.0 ^c | 2813 |
| Viht N560 | 84.0 | 2689 | 89.0 ^c | 2847 |
| IMR 4831 | 78.0 | 2617 | 83.0 ^c | 2791 |
| MagPro | 86.0 | 2714 | 93.5 ^c | 2825 |
| *RL 22 | 82.5 | 2679 | 87.5 ^c | 2835 |
| IMR 7828 SSC | 82.0 | 2612 | 87.0 ^c | 2804 |



265-grain LRX BT
Sectional Density .331
Ballistic Coefficient .575
C.O.A.L 3.700"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|-------------|-----------------|----------------|-------------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| Hybrid 100V | 70.0 | 2501 | 75.0 ^c | 2672 |
| IMR 4831 | 73.0 | 2516 | 78.0 ^c | 2680 |
| Hunter | 68.5 | 2505 | 73.5 | 2622 |
| A 3100 | 73.5 | 2511 | 78.5 ^c | 2680 |
| H4831 SC | 74.0 | 2559 | 79.0 ^c | 2657 |
| *RL 22 | 77.0 | 2532 | 82.0 ^c | 2724 |

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load

340 Weatherby Magnum



280-grain LRX BT

Sectional Density .350
Ballistic Coefficient .667
C.O.A.L 3.700"

Suggested Bullet Use



285-grain TSX BT

Sectional Density .356
Ballistic Coefficient .585
C.O.A.L 3.700"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|---------------|-----------------|----------------|-------------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| RL 17 | 62.8 | 2317 | 69.7 | 2567 |
| Hunter | 64.1 | 2290 | 71.2 | 2548 |
| Hybrid 100V | 61.8 | 2321 | 68.7 ^c | 2522 |
| Superformance | 67.5 | 2323 | 75.0 ^c | 2546 |
| H4831 SC | 68.4 | 2315 | 76.0 ^c | 2550 |
| IMR 4831 | 67.4 | 2330 | 74.9 ^c | 2573 |
| *RL 22 | 74.4 | 2438 | 82.6 ^c | 2653 |

RECOMMENDED TWIST 1:10" OR FASTER

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load