


6.5x284 Norma

Case: Norma	Primer: Federal 210
Case Trim: 2.160"	Barrel Length: 26"
Twist Rate: 1:8"	Barrel: Shilen

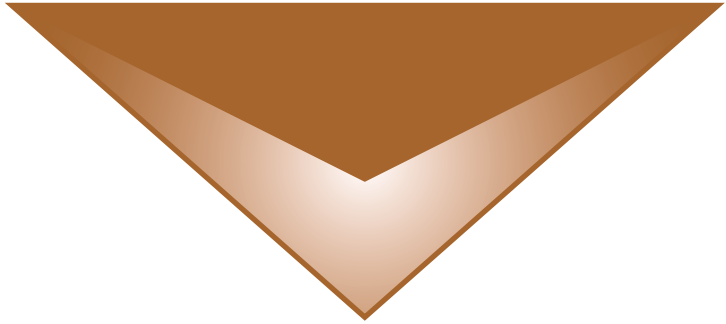

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Most Accurate Load*

[°] Compressed Load

6.5x284 Norma



127-grain LRX BT
Sectional Density .260
Ballistic Coefficient .468
C.O.A.L 2.980"

Suggested Bullet Use



130-grain TSX FB
Sectional Density .266
Ballistic Coefficient .365
C.O.A.L 2.880"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Superformance	43.3	2713	48.2	2909
RL 22	45.8	2796	50.9	3016
H4831sc	45.6	2667	50.6	2903
*H1000	46.5	2665	51.7	2932
RL 26	46.1	2801	51.2	2998
IMR 7977	48.7	2698	54.2	2918



140-grain Match Burner
Sectional Density .287
Ballistic Coefficient .586
C.O.A.L 2.980"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Superformance	45.5	2659	49.5	2817
Win 780	47.6	2604	52.9	2868
IMR 4955	45.1	2614	47.5	2729
*H4831sc	46.6	2589	51.8	2812
Norma MRP	46.8	2605	52.0	2884
RL 22	46.7	2653	51.8	2903
Magnum	52.6	2645	58.5	2961
H1000	51.1	2641	56.7	2909
RL 26	48.7	2635	54.1	2938
IMR 7977	49.2	2512	54.6	2813

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

° Compressed Load