


Case: Winchester	Primer: Federal GM210M
Case Trim: 2.484"	Barrel Length: 25"
Twist Rate: 1:10"	Barrel: Wiseman

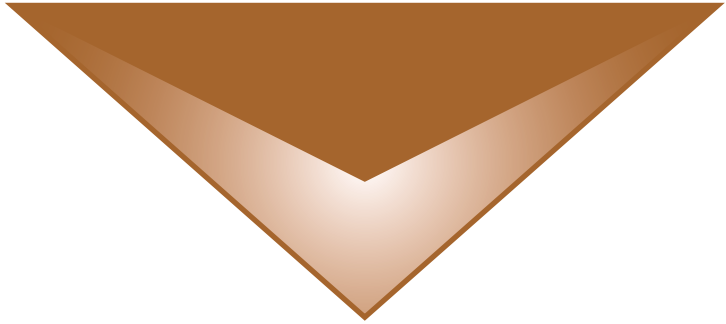

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Most Accurate Load*

[°] Compressed Load

338-06



160-grain TTSX FB
Sectional Density .200
Ballistic Coefficient .342
C.O.A.L 3.290"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
TAC	57.0	3096	62.0	3246
IMR 3031	52.5	2887	57.5 ^c	3128
H322	51.0	2876	56.0	3122
RL 10X	50.0	2918	55.0	3172
Win 748	63.0	3093	68.0 ^c	3261
*H335	57.0	3095	62.0	3241



185-grain TSX BT
Sectional Density .231
Ballistic Coefficient .352
C.O.A.L 3.250"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
TAC	52.0	2726	55.5	2896
*H4895	52.5	2758	55.5	2925
Varget	54.5	2757	58.0 ^c	2936
IMR 4064	53.5	2769	58.0 ^c	2949
A-2520	58.0	2829	63.0	3015
IMR 4320	54.0	2687	58.5	2877



185-grain TTSX BT
Sectional Density .231
Ballistic Coefficient .432
C.O.A.L 3.330"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

^{*}Most Accurate Load

^c Compressed Load

338-06



210-grain TSX BT
Sectional Density .263
Ballistic Coefficient .404
C.O.A.L 3.350"

Suggested Bullet Use



210-grain TTSX BT
Sectional Density .263
Ballistic Coefficient .482
C.O.A.L 3.330"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
A-2520	53.5	2578	57.0	2724
IMR 4320	51.5	2512	54.0	2657
A-2700	60.0	2625	65.5 ^c	2793
*RL 15	50.0	2565	53.0	2689
Winchester 760	57.0	2603	64.5 ^c	2820
H414	57.0	2608	65.0 ^c	2831



225-grain TSX FB
Sectional Density .281
Ballistic Coefficient .386
C.O.A.L 3.350"

Suggested Bullet Use



225-grain TTSX BT
Sectional Density .281
Ballistic Coefficient .514
C.O.A.L 3.330"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4320	49.0	2378	52.0	2538
A-2700	57.0	2505	64.0 ^c	2719
Big Game	54.5	2501	60.0 ^c	2690
*RL 15	48.0	2436	51.5	2592
Winchester 760	54.0	2505	59.5	2658
H414	54.0	2515	61.5 ^c	2699

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load

338-06



250-grain TSX FB
Sectional Density .313
Ballistic Coefficient .425
C.O.A.L 3.350"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4320	47.0	2211	50.0	2359
A-2700	52.0	2280	58.0	2471
*Big Game	52.0	2322	57.0 ^c	2493
RL 15	45.0	2223	49.0	2402
Winchester 760	50.0	2306	56.5	2497
H414	49.5	2279	55.5	2469



250-grain LRX BT
Sectional Density .313
Ballistic Coefficient .602
C.O.A.L 3.330"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

^aMost Accurate Load

^c Compressed Load