


338 Lapua Magnum

Case: Lapua	Primer: Federal 215
Case Trim: 2.714"	Barrel Length: 24"
Twist Rate: 1:10"	Barrel: Krieger

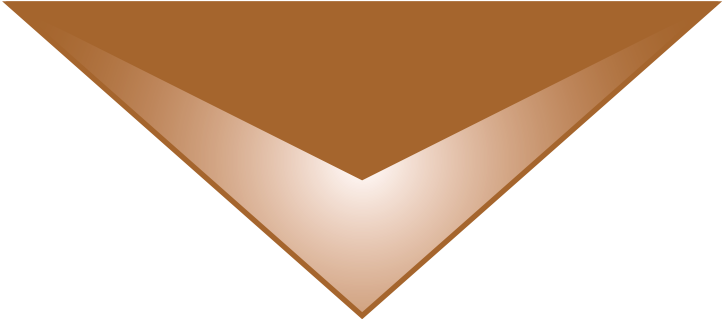

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Recommended Powder*

[°] Compressed Load

338 Lapua Magnum



160-grain TTSX FB
Sectional Density .200
Ballistic Coefficient .342
C.O.A.L 3.600"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hybrid 100V	87.6	3321	97.3 ^c	3641
RL 19	95.1	3337	105.7 ^c	3694
H4831	95.2	3245	105.7 ^c	3591
RL 22	97.2	3326	108.0 ^c	3694
IMR 7828SSC	93.8	3201	104.3 ^c	3583
*Magnum	104.6	3336	116.2 ^c	3670



185-grain TSX BT
Sectional Density .231
Ballistic Coefficient .352
C.O.A.L 3.600"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hybrid 100V	83.0	3086	92.2	3399
RL 19	88.9	3150	98.8 ^c	3423
H4831	89.7	3054	99.6	3345
*RL 22	90.7	3142	100.8 ^c	3431
IMR 7828SSC	88.2	3001	98.0	3349
Magnum	96.1	3073	106.7 ^c	3416



185-grain TTSX BT
Sectional Density .231
Ballistic Coefficient .432
C.O.A.L 3.600"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load

338 Lapua Magnum



210-grain TSX BT
Sectional Density .263
Ballistic Coefficient .404
C.O.A.L 3.600"

Suggested Bullet Use



210-grain TTSX BT
Sectional Density .263
Ballistic Coefficient .482
C.O.A.L 3.600"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
RL 19	83.4	2932	92.7	3193
H4831	85.5	2904	95.0	3148
RL 22	84.8	2943	94.2 ^c	3193
IMR 7828SSC	84.8	2870	94.2	3163
H1000	92.1	2891	102.3 ^c	3185
*Magnum	92.8	2898	103.1 ^c	3211



225-grain TSX BT
Sectional Density .281
Ballistic Coefficient .386
C.O.A.L 3.600"

Suggested Bullet Use



225-grain TTSX BT
Sectional Density .281
Ballistic Coefficient .514
C.O.A.L 3.600"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
H4831	81.4	2800	90.4	3009
RL 22	80.4	2833	89.4	3052
IMR 7828SSC	82.0	2757	91.1	3027
*H1000	88.9	2829	98.8 ^c	3074
Magnum	89.7	2789	99.7 ^c	3091
RL 25	85.5	2866	95.0 ^c	3097

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load

338 Lapua Magnum



250-grain TSX FB
Sectional Density .313
Ballistic Coefficient .425
C.O.A.L 3.530"

Suggested Bullet Use



250-grain LRX BT
Sectional Density .313
Ballistic Coefficient .602
C.O.A.L 3.560"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
RL 22	73.7	2581	81.9	2814
IMR 7828SSC	74.7	2572	83.0	2806
H1000	79.9	2616	88.8	2835
Retumbo	81.9	2653	91.0	2897
Magnum	84.6	2626	94.0	2880
*RL 25	76.3	2568	84.7	2827



265-grain LRX BT
Sectional Density .331
Ballistic Coefficient .575
C.O.A.L 3.630"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 7828SSC	74.1	2499	82.3	2734
H1000	78.2	2551	86.9	2772
Retumbo	81.4	2597	90.5 ^c	2821
Magnum	83.9	2567	93.2	2814
RL 25	75.8	2516	84.2	2755
*US 869	97.3	2640	108.1 ^c	2930

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load

338 Lapua Magnum



280-grain LRX BT
 Sectional Density .350
 Ballistic Coefficient .667
 C.O.A.L 3.680"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 7828SSC	71.4	2364	79.4	2597
*H1000	77.2	2442	85.7	2649
Retumbo	78.6	2485	87.4	2702
Magnum	81.5	2452	90.5	2701
RL 25	73.3	2398	81.4	2637
US 869	95.3	2552	105.9 ^c	2838

RECOMMENDED TWIST: 1:10" or FASTER



285-grain TSX BT / TAC-X BT
 Sectional Density .356
 Ballistic Coefficient .585
 C.O.A.L 3.630"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 7828SSC	72.8	2432	80.9	2655
H1000	77.2	2465	85.8	2676
Retumbo	78.2	2489	86.9	2722
Magnum	81.5	2492	90.5	2724
*RL 25	73.5	2428	81.7	2665
US 869	95.1	2586	105.6 ^c	2870

RECOMMENDED TWIST: 1:10" or FASTER

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load