


222 Remington

Case: R-P	Primer: Fed 205
Case Trim: 1.690"	Barrel Length: 24"
Twist Rate: 1:14"	Barrel: Wiseman

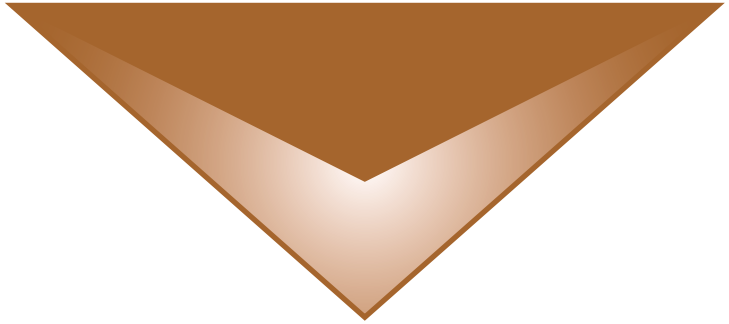

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Most Accurate Load*

[°] Compressed Load

222 Remington



30-grain Varmint Grenade FB
Sectional Density .085
Ballistic Coefficient .101
C.O.A.L 2.040"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
H4198	19.8	3397	21.8	2864
IMR 4198	19.0	3378	21.0	3796
X-Terminator	24.2	3589	26.2	3775
RL 10X	22.2	3582	24.2	3865
*A-2460	25.0	3644	27.0 ^c	3815
H335	24.0	3505	26.0	3741



36-grain Varmint Grenade FB
Sectional Density .102
Ballistic Coefficient .149
C.O.A.L 2.100"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4198	18.0	3132	20.0	3462
X-Terminator	22.5	3300	24.5	3530
*Win 748	25.0	3350	27.5 ^c	3524
RL 10X	21.0	3236	23.0	3591
H335	23.0	3277	25.0	3502
TAC	24.0	3362	26.0	3555

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

^aMost Accurate Load

^c Compressed Load

222 Remington



45-grain TSX FB
 Sectional Density .128
 Ballistic Coefficient .188
 C.O.A.L 2.130"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4198	17.5	2912	19.5	3223
X-Terminator	21.5	3054	23.5	3261
*Win 748	24.0	3152	26.0	3312
RL 10X	20.5	3036	22.5	3353
H335	22.0	2952	24.0	3281



50-grain TSX FB
 Sectional Density .142
 Ballistic Coefficient .197
 C.O.A.L 2.120"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 3031	20.2	2705	22.2 ^c	3028
*H322	19.6	2758	21.6	3052
RL 10X	18.6	2766	20.6	3051
A-2460	21.0	2853	23.0	3096
H335	20.6	2774	22.6	3030
TAC	22.4	2863	24.4	3114

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load

222 Remington



53-grain TSX FB
 Sectional Density .151
 Ballistic Coefficient .204
 C.O.A.L 2.130"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
X-Terminator	20.5	2801	22.5	3041
Win 748	22.5	2859	24.5	3088
RL 10X	19.5	2830	21.5	3110
H335	21.0	2789	23.0	3033
*TAC	22.0	2874	24.0	3104
IMR 4895	22.0	2805	24.0 ^c	3018

Recommended Twist 1:12 or Faster

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

^aMost Accurate Load

^c Compressed Load