

30-30 Winchester

Case: Remington


Primer: Remington 9 1/2

Case Trim: 2.029"

Barrel Length: 24"

Twist Rate: 1:12"

Barrel: Bartlein

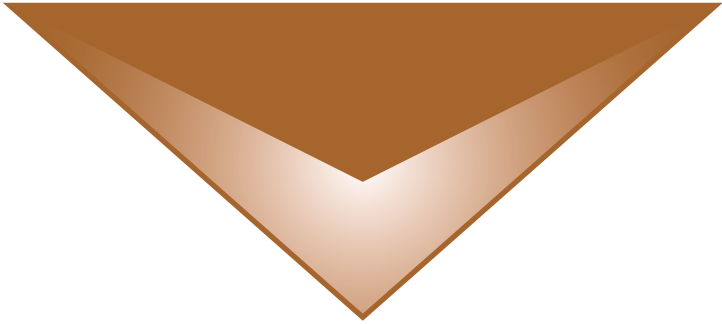

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Most Accurate Load*

[°] Compressed Load

30-30 Winchester



150-grain TSX FN
 Sectional Density .226
 Ballistic Coefficient .184
 C.O.A.L 2.470"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
H4198	23.3	1801	25.9	2001
IMR 3031	27.2	1836	30.3 ^c	2071
RL 10x	24.9	1835	27.7	2017
Win 748	29.4	1874	32.7 ^c	2124
A 2460	29.0	1931	32.3 ^c	2136
IMR 8208 XBR	28.0	1900	31.1 ^c	2131
*Tac	29.2	1925	32.4 ^c	2120
H4895	29.2	1932	32.4 ^c	2139
RL 15	30.5	1971	33.8 ^c	2187
LEVERevolution	32.7	2111	36.3 ^c	2316

Use a roll crimp on 150-grain TSX FN bullets when loading cartridges intended for rifles with tubular magazines.

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

^c Compressed Load